

HIGH BRIGHTNESS WINDOW FACING DISPLAY SPEC


Picture								
Model No.	Series	KGI32DTH	KGI43DTH	KGI49DTH	KGI55DTH	KGI65DTH	KGI75DWH	KGI86DWH
Cabinet.	Material	Metal						
	Color	Black						
	Dimensions	731.8*55*426.3mm	974.6*55.5*562.8mm	1107.2*55.5* 637.4mm	1242.9*55.5*713.8mm	1461.8*55.5*836.9mm	1676.5*67.5*954.7mm	1958*66.4*1129mm
	Vesa	200*200mm	400*400mm	400*400mm	400*400mm	400*400mm	600*400mm	650*700mm
	Net.Weight	8.5kg	13kg	15.8kg	20kg	29kg	38kg	52kg
LCD Panel	Screen Diagonal	32inch	43inch	49inch	55inch	65inch	75inch	86inch
	Resolution (H x V)	3840*2160	3840*2160	3840*2160	3840*2160	3840*2160	3840*2160	3840*2160
	Contrast(Typical)	3000:1	3000:1	3000:1	3000:1	3000:1	3000:1	3000:1
	Brightness(Typical)	2500cd/m2	2500cd/m2	2500cd/m2	2500cd/m2	2500cd/m2	2500cd/m2	2500cd/m2
	Display Color	8 bits, 16.7M	8 bits, 16.7M	8 bits, 16.7M	8 bits, 16.7M	8 bits, 16.7M	8 bits, 16.7M	8 bits, 16.7M
	Response Time(Typical)	6.5ms	6.5ms	6.5ms	6.5ms	6.5ms	6.5ms	6.5ms
	View Angles LR, UD(CR>10)	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
	Backlight rated hours	≥50000hours	≥50000hours	≥50000hours	≥50000hours	≥50000hours	≥50000hours	≥50000hours
System	Solution	Android 11						
Configuration	CPU	RK3568, Quad-core, up to 2.0 GHz						
	GPU	Mali-G52						
	RAM	2GB						
	Storage Device	32GB						
	Network	1000 Mbps Ethernet, Wi-Fi, Bluetooth 5.0						
	Interface	1*HDMI in, 1xRJ45, 2*USB, Earphone out, RS232/RS485, etc						
Support	Video	H.265, H.264, VP8, MAV, WMV, AVS, H.263, MPEG4, etc						
	Music	MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP, etc						
	Photo	JPG, JPEG, BMP, PNG, GIF						
Power	AC Power Range	100-240V AC, 50/60HZ						
	Rated Consumption	≤55W	≤157W	≤200W	≤355W	≤385W	≤440W	≤950W
	Standby Consumption	≤1W	≤1W	≤1W	≤1W	≤1W	≤1W	≤1W
Operating Condition	Working Temperature	-10 C ~60 C						
Feature	On Screen Display	English etc.						
	Power On when plugged in	Yes						
Accessory	Built-in Speaker	2*5W						
	Power Cable	1.8 meters						
Others	APP Control	Mobile APP wireless control, no need server						
	Internet Remote Control	Support Free Cloud-Based management						
	Highly Integrated	Integrated Wi-Fi/ Ethernet/USB/TF/serial/infrared remote control interface						
	Multiple Communication Method	Support multiple program update methods: U-Disk/TF Card/Wi-Fi/Ethernet/Cloud						
Packing Info	Carton size	870*200*560mm	1120*200*720mm	1255*200*780mm	1395*200*850mm	1605*200*960mm	1850*240*1170mm	2100*240*1290mm
	G/W	13kg	19kg	23kg	28kg	39kg	52kg	70kg

Multi-Installation Way


Floor stand/wall mounted/suspended, a variety of installation methods, support custom use



Suspended

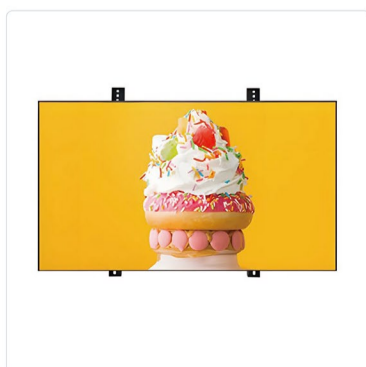

Wall mounted

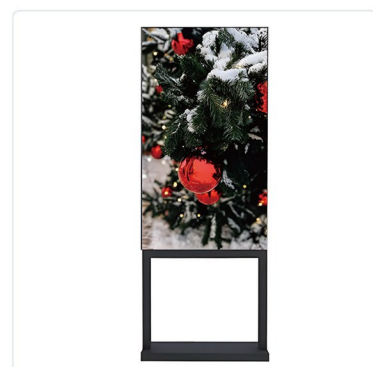

Floor stand